

### Designed for the real world

### Instructions for Installation and Use

MSZ 702 NF UK
MSZ 703 NF UK
MSZ 702 NF D UK
MSZ 703 NF D UK
MSZ 702 NF HB UK
MSZ 703 NF HB UK

#### To the Installer

Before installation fill in the product details on the back cover of this book.

The information can be found on the rating plate.

#### To the User

You must read the instructions prior to installing and using the appliance and then retain them for future reference.



### USER GUIDE





MSZ 702 NF UK MSZ 703 NF UK



MSZ 702 NF D UK MSZ 703 NF D UK



MSZ 702 NF HB UK MSZ 703 NF HB UK

Read this user guide thoroughly and carefully before using for your safety and optimal performance of refrigerator.

side by Side Refrigerator

#### **Contents**

Be sure to keep for safety 1~3
Installation Guide · · · · · 4
Control Panel5
Temperature Control6
How To change Interior Light Bulb7
How to use interior Parts 8~10
How to use the Dispenser10
How to use Automatic Icemaker11
Care & Cleaning12~13
Before You Call for Service 14
Something strange?  Don't worry. Here is the answer
Installation Preparation16
If the refrigerator can not enter the door, follow these steps
Refrigerator Leveling & Door Adjustment(if needed.)19
How to install Water Line20~21



### Be sure to keep for safety!

■ Read these safety instructions thoroughly and carefully before using. Please keep this user guide at hand for future reference.



Indicates the possibility of danger of death or serious injury



Indicates the possibility of risk of personal injury or material damage

#### Other Signs



DO NOT remove or disassemble!



NO., DO NOT...



Be sure to unplug from receptacle(outlet/mains)!



Be sure to keep and follow!



- If the supply cord is damaged, it must be replaced by the manufacturer or its service agent or a similarly qualified person in order to avoid a hazard.
- The appliance must be positioned so that the plug is accessible

#### WARNING



Never let the power cord be crushed by the refrigerator itself or other (heavy)

Never bend power cord excessively.

• If the cord is damaged or peeled, it can be a cause of fire and electric shock.



Do not plug several appliances into the same wall outlet (receptacle).

It can be a cause of overheating and/or fire. Use an exclusive grounding receptacle for the refrigerator.



Never hold the power cord or plug with wet

There is a risk of electric shock.



Never use a damaged power cord or plug, or loose main socket.

● There is a risk of fire, electric shock or serious injury.



Be sure to ground. Check if your wall outlet is grounded (earthed).

There is a risk of electric shock hazards.



Never unplug by pulling only the power cord wire. Always grip the plug firmly.

#### WARNING



#### Let the cord from the plug outlet be directed Downwards.

 If it is directed up, the cord near the plug is bent and can be damaged, which can cause an electric shock or fire.



Do not install the refrigerator on a wet floor or in a place with much humidity moisture.

 Electric insulation gets weakened, resulting in a risk of electric shock hazards.



Never let the power cord touch or pass over

 Power cord can be damaged, resulting in a risk of electric shock hazards.



Check if plug is loose from the wall outlet.

 Electric insulation gets weakened, resulting in a risk of electric shock hazards.



Never pour or spray water into the refrigerator (both interior and exterior).

heating appliances.

 Electric insulation gets weakened, resulting in a risk of electric shock hazards.



Do not place containers with water or liquid on top of refrigerator.

 Water can be poured into the refrigerator and can cause electric shock hazards or damage.



Do not let children hang on the refrigerator

Refrigerator can fall and do harm to them.



Do not move or remove compartment shelves/pockets while foods and containers

 Hard container (of glass, metal etc.) can fall to hurt you and can break shelf glass and interior parts.



Never repair or disassemble or amend the refrigerator on your own

 There is a risk of personal injury or damage to the refrigerator. It is recommanded that any service be carried out by a qualified person.



Never store any flammable gas or liquid in the refrigerator.



Never use flammable gas, benzene, thinner, gasoline, spray etc. near the refrigerator.

 There is a risk of fire, explosion and personal injury or damage.



If a gas leak is found near the refrigerator or in the kitchen, ventilate it immediately without touching power plug or refrigerator.

#### WARNING



Do not store medicine, academic research samples which require strict temperature control in the refrigerator.



Never insert fingers or hands into the bottom of refrigerator, especially into the bottom back.

 You can be hurt by sharp metal edges or can receive an electric shock.



Do not change fuse or light bulb on your own. Call the service agent to change them.



When you find the power cord damaged or cut, call the service agent immediately.



When you get rid of your old refrigerator, be sure to remove the door packings first.

 Children can be entrapped and suffocated in an abandoned refrigerator. Leave it "just a few days!" is very dangerous.

#### CAUTION



Be sure to unplug when the refrigerator is not used for a long time.




Never touch foods and containers especially of metal with wet hands in the freezer compartment.

You can be hurt by chilblains or cold bum.



Never eat any decayed or deteriorated food at all.





Never place bottles and containers of glass in the freezer compartment.

 Glass containers and bottles can be broken. so can hurt you.



When moving the refrigerator (horizontally or tilted), more than 2 persons are required to

( One to hold top back handles, the other, bottom holder.)

If other parts gripped, it is very dangerous and likely to slip.



3

Be sure to turn up the wheel first before moving the refrigerator.

- The wheels can damage or scratch the floor. If you move it a long distance, never forget to fasten the interior parts tightly with tapes.
- The parts can collide and break each other.



### **Installation Guide**

\*Read these safety instructions carefully before use and follow precautions for your safety.



#### Precautions in installation and power connection


- ■To prevent fire, electric shock or leakage
- 1 Never install the refrigerator on a wet, watery floor or where water can easily gather.
- Check the following before power connection.
- Connect power plug only to a grounded wall receptacle (an earthed mains).
- Do not plug refrigerator power together with other appliances to a same receptacle(socket).
- B Do not use an adapter plug or an extension cord.
- Do not let power cord be crushed down by other (heavy) objects .
  - \* If you hear strange noise or strong chemical odour or find smog etc. from the refrigerator after power plugin, pull out the plug immediately and call the service.
  - \* Wait about 5 minutes before you plugin again in order to prevent any
  - damage to the compressor and electrical devices of refrigerator.
  - \*\* Wait 2~3 hours until the inside gets cold enough after the first power plugin, then store foods inside. (There can be some peculiar smell of plastic parts at initial operation of refrigerator after plugin.
  - The smell fades away as the refrigerator works and doors are opened and closed.)



#### /N Precautions in use -

■To prevent personal injury, fire, electric shock etc. read this user guide carefully before use and keep it at hand for any reference.

#### ■Accessories



# **Control Panel**



\* Panel of Dispenser Model shown. Actual bottons and display is model dependent.



It shows that the digital control system is working the refrigerator. (The icon is always on while the refrigerator is working.)



As long as the refrigerator is working deodorization is always on.




The NORMAL (Red LED) is OFF for 6 months after the first installation of the refrigerator.

- When the time comes to change the filter or RESET, press the [RESET WATER FILTER] for 5 seconds then the LED will change to NORMAL ( Red LED is off ).



For your convenience you can select WATER / CUBED ICE or CRUSHED ICE. A LED lights up to indicate your selection is ON.





- Try to avoid placing the rim of your glass near the bottom of the pad, otherwise Water or Icecubes may spill or splash.
- You will hear a snap sound 2 seconds after the icecubes come out. This is from the shut off ice-out valve.
- Wait 2~3 seconds after pushing the pad to get all the available water or ice cubes.



When cleaning the icecubes case assembly or when you do not use for a long period of time, remove the icecubes in the ice storage case and press the button to stop making icecubes.



- Interior lights of refrigerator turn off when the doors are open for more than 10 minutes.
- In case either freezer or refrigerator door is open for more than a minute, door alarm rings for 5 minutes with 1 minute interval.



### **Temperature Control**

\* When this refrigerator is first plugged in, the temperature mode is set to [Middle].





\*\* Panel of Dispenser Model shown. Actual bottons and display is model dependent.

#### Freezer Compartment

Push the "freezer set" button and the setting temperature changes as the figure shows.

>>> Sequential Temperature Change <<<











When you want faster freezing, push the "super freeze" button. Just push the button once again when you want to stop the mode.





- The inside temperature varies according to door openings, amount of foods, surrounding temperature
- The mode ends automatically and it returns to the previously set mode.

For example) The refrigerator is working on [LOW Mode]. --> [super freeze] starts and ends. --> Returns to [LOW Mode] again.

#### **Refrigerator Compartment**

Push the "fridge set" button and the setting temperature changes as the figure shows.

>>> Sequential Temperature Change <<<





#### **Faster Cooling or** Refrigeration

When you want faster refrigerating, push the "super cool". Just push the button once again when you want to stop the mode.





- The inside temperature varies according to door openings, amount of foods, surrounding temperature etc.
- The mode ends automatically and it returns to the previously set mode.

For example) The refrigerator is working on [LOW Mode]. --> [super cool] starts and ends. --> Returns to [LOW Mode] again.




Foods in the refrigerator can be frozen if the ambient temperature of the refrigerator is below 5 °C.

### How To change the Interior Light Bulb

The lamp shall be replaced only by a service agent or similarly qualified person.


#### **Change of Freezer Lights**




Remove the screw caps at the bottom of the light cover with a tiny tip screw driver.



Remove the 2 screws retaining the light cover.



Hold the botton of the light cover and pull forward to remove



Change the light bulb. \*Follow the reverse order of disassembing after changing the light

#### **Change of Refrigerator Lights**

#### **Refrigerator Top Lights**



Remove the screw caps located at the bottom of the light cover with a small tip screw driver.



Remove the screws retaining the light cover.



Hold the bottom of cover and pull forward to remove.



Change the light bulbs. \*Follow the reverse order of disassembing when assembling back.

#### Refrigerator Bottom Lights



Snap out the bottom hook of the light cover with a flat tip screw driver.



Hold down the light cover to pull out.



Change the light bulb. Follow the reverse order after changing the light.



### How to use the interior parts


### Caution Do not touch or hol compartment.

- Do not touch or hold with wet hands foods (foods container) in the freezer compartment.
  - There is a risk of chilblains (cold burn)
- Do not store medicine, academic research samples etc. in the refrigerator.
- Do not store vegetables in the chilled room, for they can be frozen.



Egg case can be placed on a refrigerator shelf as you like.

#### ■Interior Parts

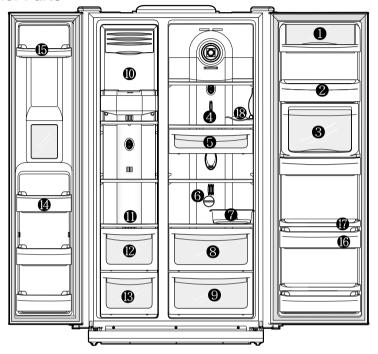

\* Dispenser models illustrated. Features are model - dependent.

8

### Dairy Pocket For storing dairy products such as butter and cheese



Refrigerator Shelf (tempered glass)

For storng common foods



Small Pocket

For storing small packed foods

Ghilled Case
For storing foods temporarily that are ready to cook (meat, fish...)



Refreshment Pocket
(Refreshment Pocket Models Only)

For frequently used cans, drink water, beverages

Switch Handle for Chilled Room or Vegetable

#### 

Place the case for your convenience.

(Do not use the case for storing ice cubes nor place in the freezer compartment.)

#### Vegetable Case & Chilled Case

Refer to page 10.

#### Fruit Case

For storing fruits

#### (n) Ice cubes storage case

For storing icecubes.

#### (Freezer Shelf (tempered glass)

For storing frozen foods such as meat, fish, ice-cream...

#### Drying Case of Freezer

for storing dried foods for so long (dried squid, dried anchovy etc.)

#### (R) Meat case of Freezer

for storing meat, fish, chicken with foil cover or vinyl wrap

#### Freezer Pocket

for storing frozen foods
(Do not store ice cream or long stored foods on the top freezer

#### Freezer Small Pocket

for storing small frozen foods

#### ( Refrigerator Pocket

for storing refrigerating foods, milk, juice, beer bottle etc.

#### Refrigerator Pocket Guide

to prevent (tall) foods on the pocket from falling

#### ( Wine Bottle Support (Option)

### **Food Storage Tips**



Wash foods before storing.



Divide and separate foods into smaller pieces.



Place watery foods or foods with much moisture in front of shelves (close to door side).

If they are placed close to the cold air spout, they can be frozen.



Warm or hot foods should be cooled down enough before storing to reduce power consumption and to enhance refrigeration performance.



Be careful in storing such tropical fruit as bananas, pineapples, tomatos, for they can easily be deteriorate in lower temperature.




Keep enough space between the foods as possible. If too tight or too close, cold air circulation is hindered, resulting in poor refrigeration.



Never forget to cover or wrap foods to prevent odour of foods.

#### ■Vegetable Case & Chilled Case

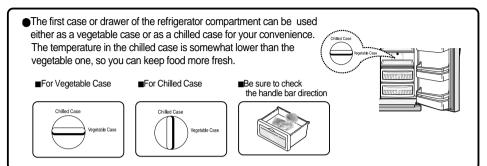


- If you store vegetables and fruits in the chilled room mode, they can be frozen.
- If you store fish in the chilled room mode for a long time, it can deteriorate. Store it in the freezer compartment.
- Do not place foods close to the cold air spout, for it can weaken cold air circulation.



### How to use the Dispenser (For Dispenser models)

■ Select WATER / CUBED ICE / CRUSHED ICE and press the cup on the PUSH pad for your convenience.

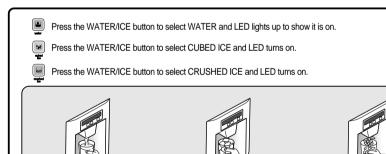

₩ When you get [CUBED ICE] or [CRUSHED ICE], remove the cup from the pad when if it is half full. ( If you don't, the remaining ICES will make the cup overflow or the dispenser outlet become blocked.)



Avoid using thin fragile cups or crystal glasses when taking (crushed) icecubes.

**CUBED ICE** 

• For your safety, never insert your fingers or other tools into the dispenser outlet.

10

■ If you find the (crushed/cubed) ices discolored, stop using the dispenser and call the service agent.

CRUSHED ICE

● 1 hour after you get [CUBED ICE] or [CRUSHED ICE], the selection mode returns to [WATER] automatically.

#### ■ Ice Cubes Maker (For MSZ 70\* NF UK Models Olny)

 Pull out ice cubes maker and fill with pure water.



- Do not pour water too much, for the ice cubes made get sticky and do not to separate easily.
- •Keep in mind not to go beyond the water line with an arrow mark when filling with water.

When ice cubes are ready, turn the handle clockwise to separate.



- If ice cubes are not to fall easily, turn. it to the end several times.
- Do not turn the separation handle if the ice cubes are not ready, for they gets sticky on the ice tray and case.

**3**Do not use ice cubes case to make big ice block, for it can be broken. Pull out the case, clean and dry it if not used (for a long time).



### How to use the Automatic Icemaker (For Dispenser models)

- About 10 icecubes (7~8 times a day) are made at one time. If the ice storage case is full, icemaking stops.
- It is normal for the icemaker to make banging sounds when the icecubes are falling into the ice storage case.
- To prevent a bad odour or smells, regularly clean the Icecubes Storage Case.
- If the amount of ice in the storage case is not sufficient, the ice may not be dispensed. Wait a day or so to make more ice.
- If the ice does not dispense easily, ensure the dispenser outlet is not blocked.

#### In case the icemaker doesn't work



#### If the icecubes get stuck and not dispensed

- Pull out the ice storage case and separate the icecubes any icecubes that may have stuck together.
- If the amount of water which is supplied to the icemaker needs adjusting. Call for the service agent.

#### In case of power failure


■ The icecubes in the case may melt to flow down to the freezer room. If a long hours' of power failure is predicted, pull out the case, remove the icecubes in it and replace it back.

11



Use only the ices out of this refrigerator.

# Care & Cleaning

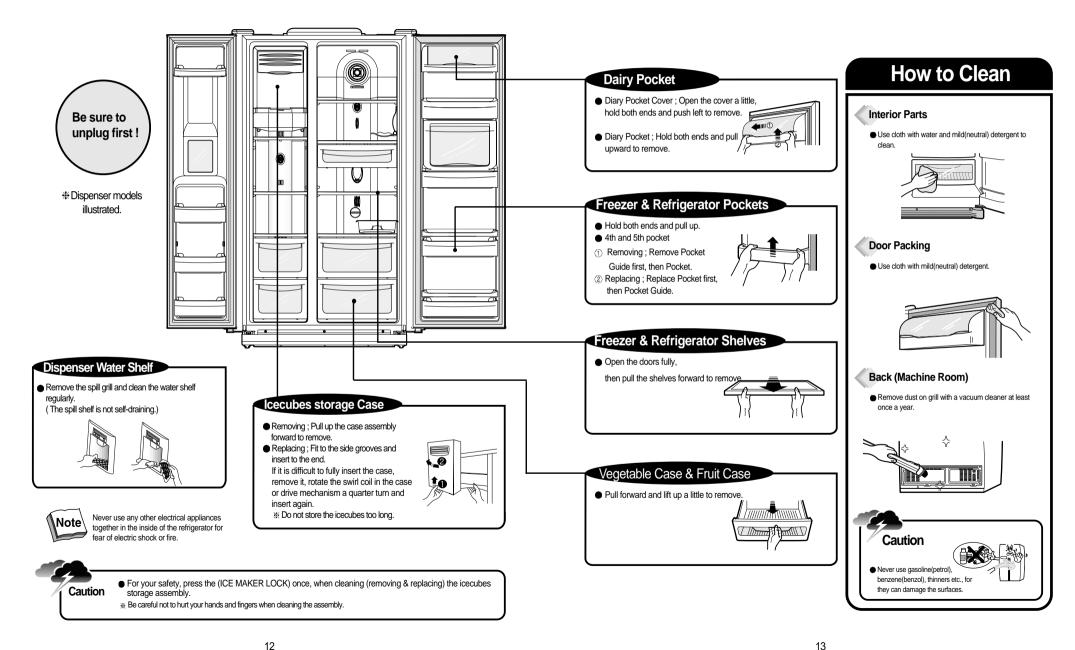




### Before You Call for Service...

Please checkup the following troubleshooting tips before you call for service!

#### **Checkup Point Action Problem** It never gets cold inside. • Is the refrigerator unpluged? Plug in the refrigerator. Freezing & refrigerating is ☑ Is the temperature set to [Low Mode]? 2 Set the temperature mode to Middle or High. not so good. 3 Is the refrigerator under direct sunlight or is any Move to a place where there is no direct heat appliance placed near it? sunlight, no heat appliences around. A Is the space between refrigerator back and the A Keep sufficient space (more than wall too close ? 10cm)between refrigerator back and the wall. Foods in the ♠ Is temperature set to [Strong]? • Set the temperature to [Middle] or [Low]. refrigerator get frozen @ Foods can be frozen if ambient temperature is Is surround temperature too low? below 5 °C. Move to a place where the (3) Is the food with much moisture stored close to the temperature is over 5 °C. cold air spout? Place foods with moisture on the shelves close to the doors. • Is floor beneath the refrigerator uneven? Move the refrigerator to a level and even Strange sound from 2 Is the space between refrigerator back and the the refrigerator wall too close? Keep sufficient space. 3 Do any objects other stuff touch the refrigerator? Remove any object a way which touches the Be sure to cover and wrap the foods. • Is the food stored uncovered or unwrapped? Odour or disgusting Clean them regularly. Once smell gets 2 Are the shelves and pockets stained with food smell from the inside soaked to those parts, it is not easy to (a) Is the food stored too long? 3 Do not store foods for so long. A refrigerator is neither a perfect nor a permanent foods keeper.

# Something strange? Don't worry. Here is the answer.

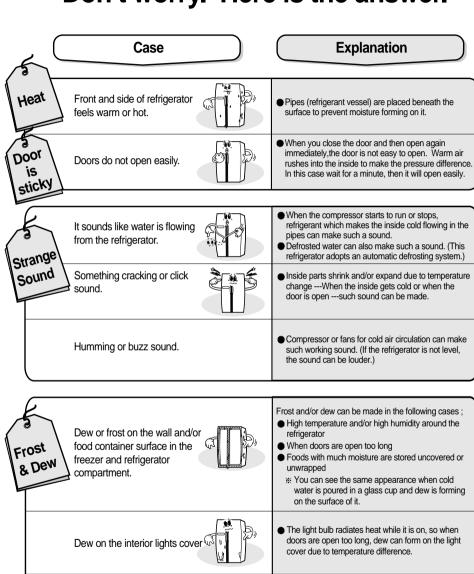

Dew on the cabinet surface

In case it is highly humid around the refrigerator,

moisture in the air sticks to the surface to form the




### **Installation Preparation**


Check if the refrigerator can pass a doorway or enter a door first.


Dimensions (including Door Handles)


(Width\*Depth\*Height)  $928mm \times 801mm \times 1808mm$ 



#### Find a suitable place to install









Once the installation place is ready follow the installation instructions.
If surround temperature of refrigerator is low (below 5 ℃), foods can be frozen or the refrigerator can work in abnormal way.

16

## a

### If the refrigerator can not enter the door, follow these steps.

#### Removing Freezer Door

\*Remove front bottom cover first, if it is attached.

Remove the bottom cover first.
Pull out the left collar of the coupling first, then hold the coupling and pull out the left water tube.
(Dispenser Models Only)



2 Unscrew top hinge cover with a screw driver.
Insert a thin screw driver into the side groove of the cover to remove.




Turn top hinge fastener counterclockwise 3~4 times. Disconnect the harness wires.



4 Lift up the front of hinge to remove.
( After the hinge is removed the door can fall down forward. Be careful!)



5 Be careful not to damage the water line when removing the door.



#### Removing Refrigerator Door

Unscrew top hinge cover with a screw driver.

Insert a thin screw driver into the side groove of the cover to remove.



2 Turn top hinge fastener counterclockwise 3~4 times. Disconnect harness wires.




17

3 Lift up the front of hinge to remove.
(After the hinge is removed the door can fall down forward. Be careful!)




4 Lift the door straight up to remove.



#### ■ Replacing Freezer Door■

Insert the water tube into the hole of the bottom hinge pin first, then Insert the bottom of freezer door into the bottom hinge pin.



2 Insert the bottom hole of freezer door straight to the bottom hinge pin.




3 Let the top of door close to the cabinet and insert the top hinge pin to the top hole of freezer door. (Insert the back of hinge to the groove of protrusion first, then front to the top hole of door.)



Turn the hinge fastener tightly to the end.
Connect harness wirings and screw

Connect harness wirings and screw ground wire.




5 Insert the water tube far into the coupling.
(Dispenser Models Only)



#### ■ Replacing Refrigerator Door

1 Insert the bottom hole of refrigerator door straight to the bottom hinge pin



2 Let the top of door close to the cabinet and insert the top hinge pin to the top hole of freezer door.

( Insert the back of hinge to the groove of protrusion first, then front to the top hole of door.)



18

3 Turn the hinge fastener tightly to the end.

Connect harness wirings and screw ground wire.

Click and screw the top hinge cover.






# Refrigerator Leveling & Door Adjustment (If needed.)


Refrigerator must be level in order to maintain optimal performance and desirable front appearance. (If the floor beneath the refrigerator is uneven, freezer and refrigerator doors look unbalanced.)

#### • In case freezer door is lower than refrigerator door...•


Insert a screw driver (flat tip) into a groove of the left wheel (bottom of freezer) and turn it clockwise until the door is balanced. (clockwise to raise freezer door; counterclockwise to lower) :\* Unless the freezer door is balanced by step 1, then follow the next steps.



2 Open the doors, unscrew the front cover and remove, if it is attached.



- 3 Loosen 3 hinge bolts(1 on the left + 2 on the right) a little. (Do not unfasten them completely.) Insert a hexagonal wrench into the groove of adjusting nut and turn clockwise until the door is level
- 4 Once the door is balanced, fasten the hinge bolts tightly and screw the front cover





 The front of refrigerator needs to be higher just a little than the back for easy door closing, but if the wheel is raised too much for door balance, i.e. front of refrigerator is too higher than the back, it can be difficult to open the door.

#### In case refrigerator door is lower than freezer door...

Insert a screw driver (flat tip) into a groove of the right wheel (bottom of refrigerator) and turn it clockwise until the door is balanced. (clockwise to raise refrigerator door; counterclockwise to lower)

\*\*Unless the refrigerator door is balanced by step 1, then follow the next steps.



2 Loosen 3 hinge bolts(2 on the left + 1 on the right) a little. (Do not unfasten them completely.)

Insert a hexagonal wrench into the groove of adjusting nut and turn clockwise until the door is level.



19

3 Once the door is balanced, fasten the hinge bolts tightly.

#### **Front Cover**

After installation and/or door leveling, fasten front cover with screws.(Remove the screws on the front bottom panel first. Click and screw the cover)

#### **Attaching of Water Filter Holder**

Remove the back paper of the tape on the filter holder and attach the filter holder on a suitable place.

#### **How to install Water Line (Dispenser Models Only)**


- 1. The water pressure should be 3kgf/cm<sup>2</sup> or more to run the automatic icemaker.
- Checkup your tap water pressure: if a cup of 180cc is full within 10 seconds, the pressure is OK.
- 2. When installing the water tubes, ensure they are not close to any hot surfaces.
- 3. The water filter only "filters" water: it does not eliminate any bacteria or microbes.
- 4. If the water pressure is not so high to run the icemaker, call the local plumber to get an additional water pressure pump.
- 5. The filter life depends on the amount of use. We recommend you replace the filter at least once every 6months. \*When attaching the filter, place it for easy access (removing
- 6. After installation of refrigerator and water line system, select [WATER] on your control panel and press it for 2~3 minutes to supply water into the water tank and dispense water.
- 7. Use sealing tape to every connection of pipes/tubes to ensure there is no water leak
- 8. The water tube should be connected to the cold water line.




#### **Installation Procedure (Dispenser Models Only)**

#### 1. Join Connector to the tap water line

- 1) First lock the main tap water valve. Check if connector B and C has its own rubber packing ring in it.
- 2) Join Connector-C to the water tap, then Connector -B to connector -C with a wrench or spanner.
- 3) Insert water pipe into Cnnector-B and join Connector-A with a wrench or spanner.
- 4) In case Connector-C does not fit water tap join Connector-B directly to the tap.(See Figure B.) If no connector fits water tap, call your local service.
- 5) Unlock main tap water valve, open tap water and check if any
- water leaks on each joins.






<Figure A>

#### 2. Get ready to install the Water Filter


- 1) Measure an approximate distance between the filter and the Water Tube and cut the tube off filter vertically.
- 2) Connect the tubes to the filter as the figure shows.






#### 3. Remove any substances in the filter.

- 1) Open the main tap water valve and check if water comes out of the Water Tube
- 2) Check if the Water Valve is open in case water does not come out.
- 3) Leave the valve open until clean water is coming out.
- \* Initial water may contain some substances out of filter (manufacturing process).




#### 4. Attach the Filter Rox


- 1) Screw and fasten the filter holder to the left/right side of the back of
  - \* In case the holder is not fastened well, remove the back paper of the tape on the filter holder and attach it."
- 2) Insert the filter box into the holder.



#### 5. Connect the Water Tube to the refrigerator.


- 1) Remove the rear cover at the bottom back of the refrigerator.
- 2) Insert the fastening ring into the Water tube. (Be careful to follow the direction of the nut.)
- 3) Insert the Water Tube into the top of the Water Valve, turn the nut clockwise to fasten it. (The Water valve is to the right of the motors.)
- 4) Check for any bent tubes or water leaks; if so, re-ckeck instalation
- 5) Replace the rear cover. (The Water Tube should be placed between the groove of the refrigerator back and motor cover.)





#### 6. Fasten the Water Tube.

- 1) Fasten the Water Tube with the [Fastener A] .
- 2) Check if the tube is bent or sqeezed. If so, set it right to prevent any water leak.



#### 7. After installation of Water Supply System

- 1) Plug in the refrigerator, press the [WATER] button on the control panel for 2~3 minutes to remove any air (bubble) in the pipes and drain out the initial water.
- 2) Check for the water leaks again through the water supply system (tubes, connectors and pipes) Rearrange the tubes again and do not move the refrigerator.

